



Ballasts for mercury Vapour 125 W Lamps with shape (66*53) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

The winding of BM1259-AL ballast is made of aluminium enamelled wire.

BM1257/BS1104 and BM1258/BS1103 are also suitable for 110W sodium Vapour lamp.

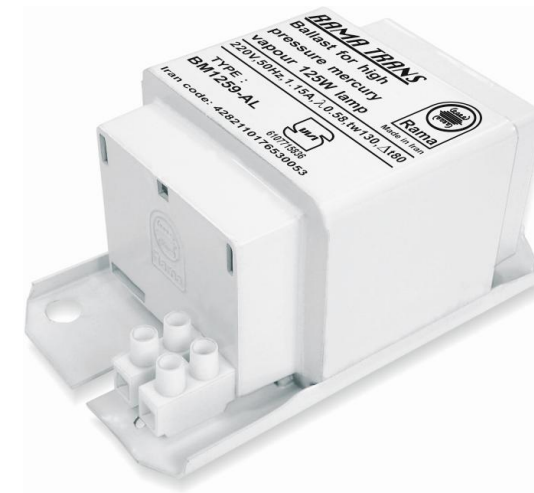

Type	Ballast					Dimensions			Weight (Kg)	Lamp		Capacitor
	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	a (mm)	b (mm)	c (mm)	Output (W)		Current (A)	C_p (μf)	
BM1257/BS1104	220/50	65	0.56	91	120	96	50	1.33	125	1.15	11	
BM1258/BS1103	230/50	65	0.53	90	120	96	50	1.37	125	1.15	11	
BM1259-AL	220/50	80	0.58	87	120	96	50	1.20	125	1.15	11	

