

Ballasts for Metal Halide Lamps 2000 W with shape (102*92) mm

Protection Class: I


Maximum winding temperature (t_w): 130 °C

According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

Use only with superimposed ignitor.

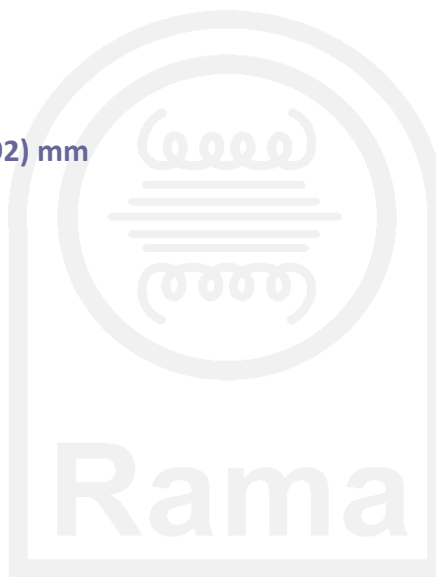

| Ballast | | | | | | | | | Lamp | | Capacitor |
|----------|---------------------|--------------------|---------------------------|------------------------------|------------|-----------|-----------|----------------|---------------|----------------|----------------------|
| Type | Voltage (V)/(Hz) | Δt (°C) | Power Factor λ | Ballast Efficiency η | Dimensions | | | Weight (Kg) | Output (W) | Current (A) | C_p (μf) |
| | | | | | a (mm) | b (mm) | c (mm) | | | | |
| BMH20001 | 380/50 | 75 | 0.54 | 95 | 315 | 301 | 250 | 17.30 | 2000 | 10.30 | 60 |
| BMH20003 | 380/50 | 80 | 0.50 | 93 | 385 | 371 | 320 | 21.68 | 2000 | 11.30/11.80 | 60 |

