

Ballasts for High Pressure Sodium Vapour and Metal Halide 250 W Lamps with shape (84*66) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

The winding of BS/BMH25013-AL ballast is made of aluminium enamelled wire.

Use only with superimposed ignitor.

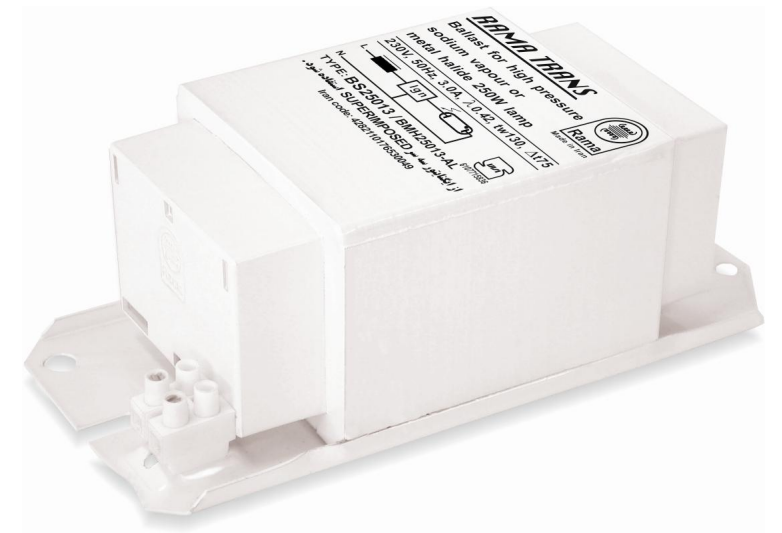

Ballast								Lamp		Capacitor	
Type	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BS/BMH25013-AL	230/50	75	0.42	89	172	150	90	3.38	250	3.0	40

