

Ballasts for High Pressure Sodium Vapour and Metal Halide 35 W Lamps with shape (66\*53) mm

Protection Class: I

Maximum winding temperature ( $t_w$ ): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

The winding of BS/BMH356-AL ballast is made of aluminium enamelled wire.

Use only with superimposed ignitor.

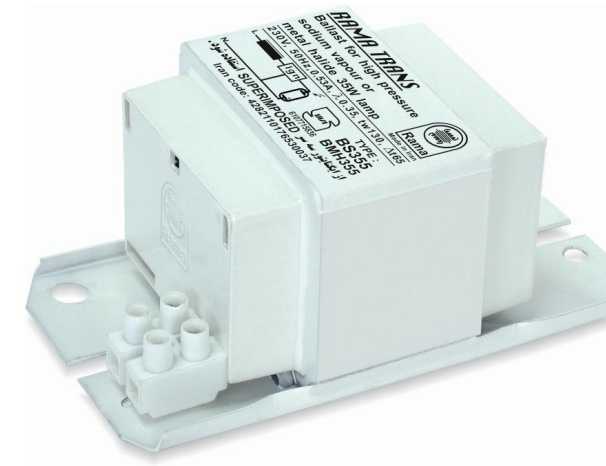

Type	Ballast								Lamp		Capacitor
	Voltage (V)/(Hz)	$\Delta t$ (°C)	Power Factor $\lambda$	Ballast Efficiency $\eta$	Dimensions			Weight (Kg)	Output (W)	Current (A)	$C_p$ ( $\mu f$ )
					a (mm)	b (mm)	c (mm)				
BS/BMH352	220/50	55	0.38	79	120	96	38	1.01	35	0.53	8
BS/BMH353	230/50	40	0.35	84	120	96	38	1.09	35	0.53	8
BS/BMH355	230/50	65	0.35	79	120	96	38	1.04	35	0.53	8
BS/BMH356-AL	230/50	65	0.36	77	120	96	38	1.04	35	0.53	8

