

Ballasts for Metal Halide Lamps 400 W with shape (76*59) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

Use only with superimposed ignitor.

Warning: the lamps current should be the same as ballasts current.

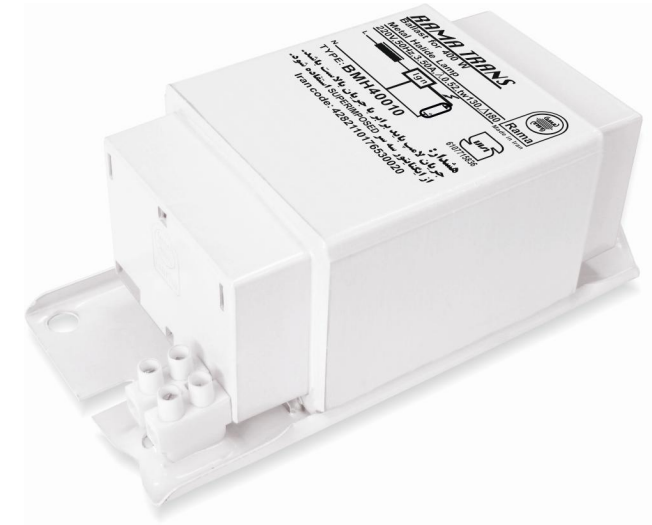

Type	Ballast							Lamp		Capacitor	
	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BMH40010	220/50	80	0.52	92	172	148	90	3.12	400	3.5	40
BMH40012	230/50	75	0.49	93	172	148	90	3.14	400	3.5	40

