

Ballasts for High Pressure Sodium Vapour and Metal Halide 150 W Lamps with shape (66*53) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C


According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

The winding of BS/BMH15015-AL ballast is made of aluminium enamelled wire.

Use only with superimposed ignitor.

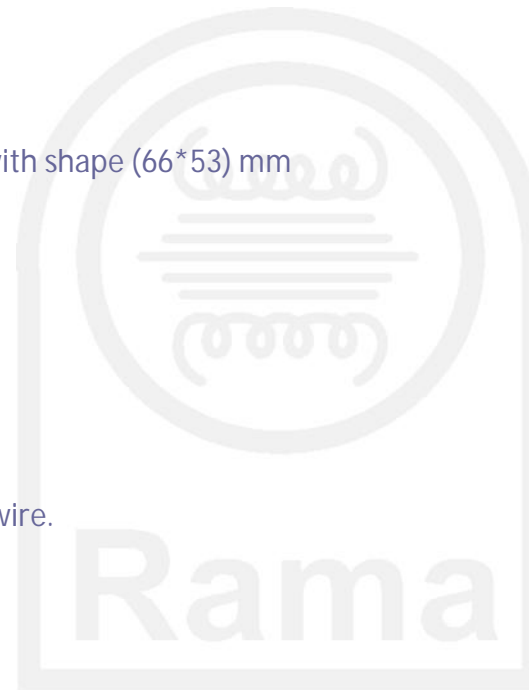

Type	Ballast								Lamp		Capacitor
	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BS/BMH1504	230/50	75	0.41	88	155	131	85	2.16	150	1.80	25
BS/BMH1508	220/50	75	0.42	88	155	131	85	2.16	150	1.80	25
BS/BMH1509	230/50	65	0.40	88	155	131	85	2.22	150	1.80	25
BS/BMH15015-AL	230/50	80	0.42	85	155	131	90	2.12	150	1.80	25

