

Ballasts for High Pressure Sodium Vapour and Metal Halide 250 W Lamps with shape (76*59) mm

Protection Class: I


Maximum winding temperature (t_w): 130 °C

According to:

IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

Use only with superimposed ignitor.

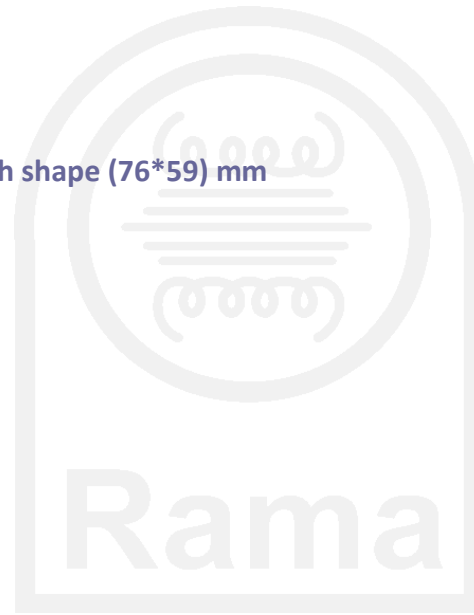

Type	Ballast							Lamp		Capacitor	
	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BS/BMH25010	220/50	80	0.43	90	172	148	90	3.06	250	3.0	40
BS/BMH25012	230/50	80	0.43	89	172	148	90	3.60	250	3.0	40

