


IG400 Electronic Super imposed ignitor with plastic case

Maximum Casing Temperature (Tc): 105 °C

According To: IEC61347-2-1, IEC60927

&

According To: ISIRI7644-2-1, ISIRI3782

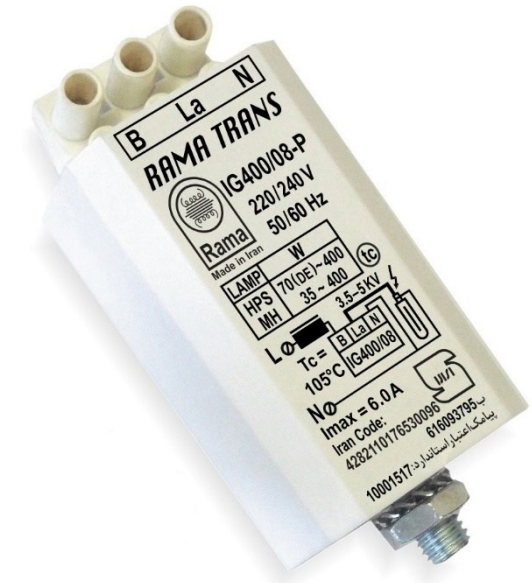

| Ignitor | | | | | | | | | | | | | Lamp | | |
|------------|-------------------|----------------|-----------------------------|----------|-------------------|------------------|-----------------------|---------|------------|--------|--------|--------|-----------------|-------------|-------------------------------|
| Type | Rated Voltage (V) | Frequency (Hz) | Permitted input Voltage (V) | Imax (A) | Peak Voltage (KV) | Pulse Width (µs) | Load Capacitance (PF) | Tc (°C) | Dimensions | | | | Casing Material | Weight (Kg) | HPS/MH (W) |
| | | | | | | | | | L (mm) | W (mm) | H (mm) | S (mm) | | | |
| IG400/08-P | 220/240 | 50/60 | 198-264 | 6 | 3.5-5 | ≥0.3 | 150 | 105 | 100 | 35 | 30 | M8×12 | PBT | 0.170 | HPS: 70(DE)-400 MH: 35-400 |

