

## IG1000 Electronic Super imposed ignitor with plastic case


Maximum Casing Temperature (Tc): 105 °C

According To: IEC61347-2-1, IEC60927

&

According To: ISIRI7644-2-1, ISIRI3782

**\* This product is not applicable for Double-Ended (DE) lamp.**

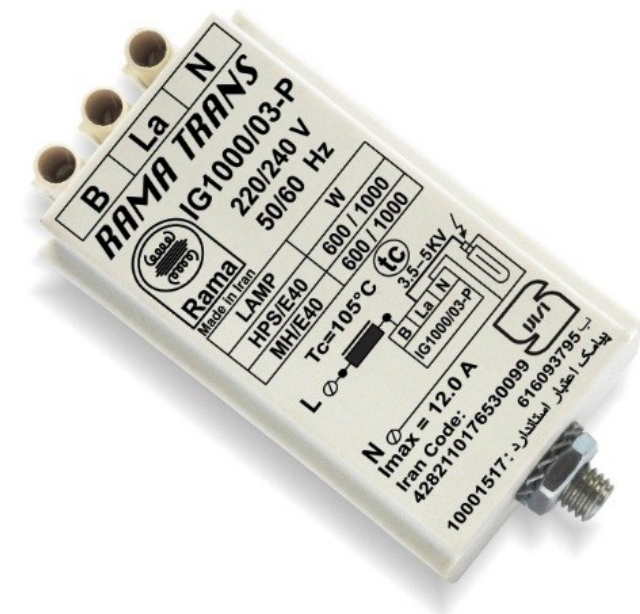

Ignitor														Lamp	
Type	Rated Voltage (V)	Frequency (Hz)	Permitted input Voltage (V)	Imax (A)	Peak Voltage (KV)	Pulse Width (μs)	Load Capacitance (PF)	Tc (°C)	Dimensions				Casing Material	Weight (Kg)	HPS/MH (W)
									L (mm)	W (mm)	H (mm)	S (mm)			
IG1000/03-P	220/240	50/60	198-264	12	3.5-5	≥0.3	150	105	103	49	42	M8×12	PBT	0.344	HPS: 600 /1000 MH:600/1000

