

Ballasts for Compact Fluorescent Lamps with shape (40\*30) mm


Protection Class: I

Maximum winding temperature ( $t_w$ ): 130 °C

According to:

IEC61347-1, IEC61347-2-8, IEC60921

ISIRI7644-1, ISIRI7644-2-8, ISIRI700-2

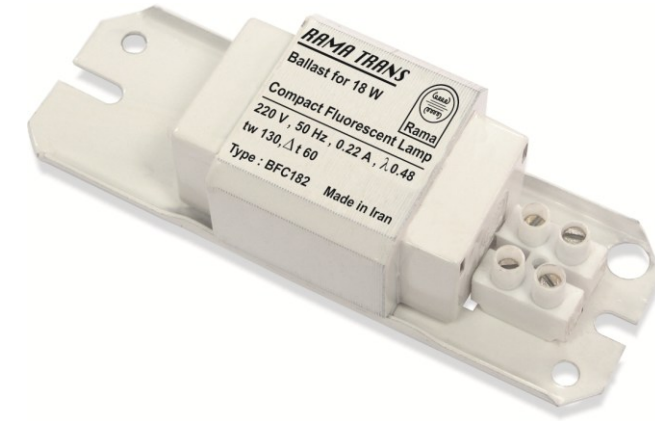

Type	Ballast						Lamp		Capacitor			
	Voltage (V)/(Hz)	$\Delta t$ (°C)	Power Factor $\lambda$	Ballast Efficiency $\eta$	Energy Efficiency Index EEI	Dimensions			Weight (Kg)	Output (W)	Current (A)	$C_p$ ( $\mu f$ )
						a (mm)	b (mm)	c (mm)				
BFC68	230/50	50	0.31	---	---	120	104	35	0.35	6,8	0.165	2
BFC101	220/50	45	0.39	---	---	120	104	35	0.35	10	0.19	2.5
BFC182	220/50	60	0.48	---	---	120	104	35	0.35	18	0.22	2.5

