

Ballasts for Metal Halide Lamps 400 W with shape (84*66) mm

Protection Class: I

Maximum winding temperature (t_w): 130 °C

According to:


IEC61347-1, IEC61347-2-9, IEC60923

ISIRI7644-1, ISIRI7644-2-9, ISIRI5190

The winding of BMH40011-AL ballast is made of aluminium enamelled wire.

Use only with superimposed ignitor.

Warning: the lamps current should be the same as ballasts current.

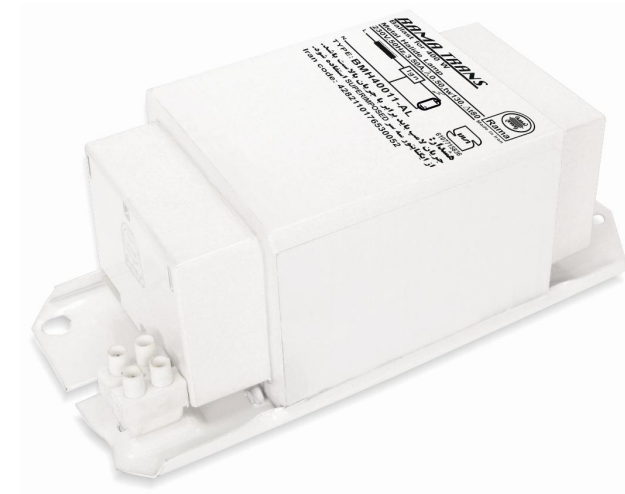

Ballast								Lamp		Capacitor	
Type	Voltage (V)/(Hz)	Δt (°C)	Power Factor λ	Ballast Efficiency η	Dimensions			Weight (Kg)	Output (W)	Current (A)	C_p (μf)
					a (mm)	b (mm)	c (mm)				
BMH40011-AL	230/50	80	0.50	91	185	162	100	3.70	400	3.5	40

